

Drill & Drop Probe



Easy installation, accurate soil moisture, salinity and temperature measurement.

The Drill & Drop probe is fully encapsulated and can be completely buried, reducing the risk of machinery damage.

Features

- Tapered shape allows for extremely fast and high-quality undisturbed installation in majority of soil types.
- Ability to measure the true soil profile, NOT slurry.
- Buriable to any depth.
- Pre-normalised sensors with inbuilt default calibration equations.
- Access soil profile data through IrriMAX Live.
- Available with moisture, salinity and temperature sensors at every 10cm (4") depth.



Watch the installation video on YouTube [▶ Sentek Technologies](#)




Paolo Antini
Business Development
Manager Europe

t +39 334 216 20 57
e pantini@sentek.com.au
sentek.com.au



Benefits

- Best choice for short-term use, such as the monitoring of vegetable crops, due to the fast and easy install and extraction techniques.
- Reliable option for long-term use, as it can be installed and left untouched for many years.
- Manage irrigations to save water, power, fertiliser and time, along with increased yields and quality.
- Fast and undisturbed, slurry-free installation procedure, increasing the validity of soil moisture and salinity readings.
- Combine soil moisture, salinity and temperature readings to see what's happening in the soil profile.

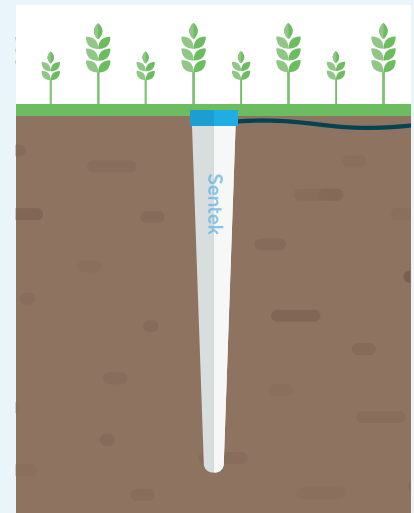

Sentek Drill & Drop Probe Specifications

Probe Lengths	10.5cm/4"	30cm/12"	60cm/24"	90cm/36"	120cm/48"
Number of Sensors	1	3	6	9	12
Outer Probe Diameter	Top: 24.5mm Bottom: 24mm	Top: 30mm Bottom: 28.75mm	Top: 30mm Bottom: 27.5mm	Top: 30mm Bottom: 26.25mm	Top: 30mm Bottom: 25mm
Types of Sensors (at each depth)	Moisture + Temperature		OR	Moisture + Temperature + Salinity	
Resolution	Moisture = 1:10000		Salinity = 1:600	Temperature = 0.3°C	
Moisture Precision	+/- 0.03% vol.				
Temperature Accuracy	+/- 2°C @ 25°C				
Operating Temperature	-20°C to 60°C				